



e-Beam

Wires & Cables



About us

V-MARC India Limited stands today as one of India's most trusted and forward-looking wire and cable manufacturers, driven by a commitment to quality, safety, and technological excellence. With a strong presence across 24+ states, the company has established a robust distribution network that brings world-class electrical solutions to households, industries, and infrastructure projects across the country.

In 2006, under Mr. Garg's visionary leadership, the company established its factory at SIDCUL Haridwar. By 2009, the product range had expanded to include LT PVC and XLPE cables, further solidifying the company's position in the market. April 2021 marked a significant milestone with the launch of the company's IPO. This achievement underscores Mr. Garg's dedication to sustainable progress and his strategic acumen.

Under his able leadership, V-MARC India Ltd. is now ranked amongst the top companies and is one of the fastest-growing companies in India. Mr. Vikas Garg has demonstrated a deep understanding of the industry, continually aligning the company's goals with the broader vision of enhancing consumer experience.

At the heart of V-MARC's leadership is its continuous investment in advanced technology. The company is among the select few in India to adopt e-Beam (Electron Beam) Technology, a cutting-edge process that enhances the strength, durability, and heat-resistance of cables. This ensures enhanced safety, longer life, and superior performance—especially critical for high-risk and demanding applications.

Among its flagship offerings, ULTRA SAFE 150 eB-HFFR has emerged as India's Safest Wire, trusted by electricians, dealers, and consumers alike. Engineered to withstand extreme temperatures—without melting even at very high heat—ULTRA SAFE 150 eB-HFFR offers unmatched protection against short circuits and electrical hazards.

Over the past years, the company has delivered fantastic year-on-year financial growth, driven by strong product demand, consistent quality, and a reputation built on trust. Backed by a visionary leadership team and a culture of innovation, the organization continues to expand its footprint in India and global markets.

V-MARC India Limited is not just manufacturing wires and cables—it is powering the nation's progress, energizing dreams, and setting new benchmarks in India's electrical industry.



ULTRA SAFE 150 eB-HFFR

Single and Multicore Flexible Cables

Conductor : Drawn From 99.97% Bright Electrolytic Grade Copper
Conductor Class -2 & 5 With More Than 100% Conductivity

Current Carrying Capacity : 80% Extra

Rated Temperature : 150°C

Life Span : 60+ years

Insulation : e-Beam Crosslinked Halogen Free Flame Retardant
Superior Insulation Resistance to Heat and Electrical Stress

Sheath : HFFR EBXL (for multicore cable)

Rated Temperature : Up to 150°C

Products Range :

Single Core

Class - 2 - upto 630 sqmm

Class - 5 - upto 300 sqmm

Specifications : IS : 17048:2018, IS : 8130 : 2013




Technical Comparison Chart

S. No.	ULTRA SAFE 150 eB-HFFR	Traditional Wire
1	Conductor Operating Temp. Upto 150°C	Conductor Operating Temp. Upto 70°C
2	Short circuit temperature 250°C	Short circuit temperature 160°C
3	Hot Set Property at 200°C = 50% (Max)	Hot Set – Not Available
4	Smoke Emission (Light Transmission) 90%	Smoke Emission (Light Transmission) 40%
5	Smoke Density 5%	Smoke Density 60%
6	Hydrogen Chloride Free	Hydrogen Chloride 20% Maximum

Features : ULTRA SAFE 150 eB-HFFR

- 80% Extra current carrying capacity
- Rated Temperature : 150°C
- No short circuit
- Insulation with e-Beam Crosslinked Halogen Free Flame Retardant non-toxic, sustainable materials.
- Superior fire resistance No smoke during contact with flame
- No harmful or poisonous gas emission
- Lasting performance beyond 60+ years

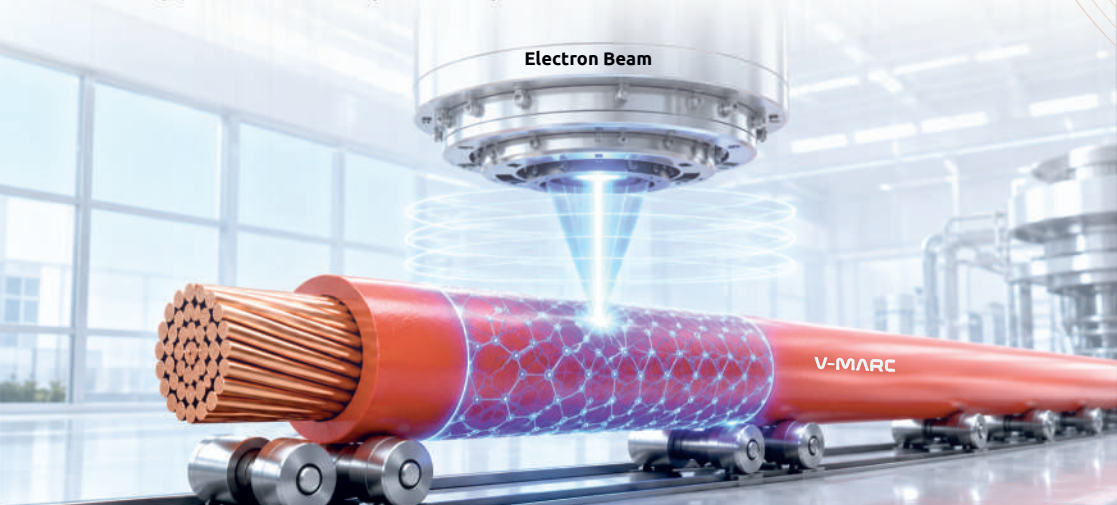

Solar & Photovoltaic DC Cable



Construction

Conductor : Electrolytic annealed Flexible tinned Copper conductor, as per IS : 17293 : 2020, IS : 8130 : 2013, conforms to IEC 60228, Class 5.

Insulation/sheath : Cross-linked XLPO e-Beam compound.

Material Properties Like fire performance, Smoke emission, Halogen emission, Toxicity Ozone Resistant, Weathering Resistance are as per reference Indian / International Standards.

Products Range : Upto 400 sqmm

Features

- Electron Beam Cross Linked
- Rated Temperature : Upto 120°C (20,000h)
- Short Circuit Temp : 250°C for Max. 5 Sec.
- RoHS compliant
- UV & Ozone resistant
- Improved oil, chemical resistance & improved crack resistance
- Enhanced mechanical properties in extreme temperature conditions
- Better ageing resistance
- Halogen Free, Flame Retardant, Fire Retardant, Low Smoke Emission
- Flexibility & Stripability for fast and easy installation
- Internal test voltage : 6500 AC for 5 mins



eB⁺ Power Cables

Product Construction:

- Conductor** : Aluminium conductor complying with IS: 8130 : 2013
- Insulation** : Cross-linked e-Beam XLPE compound
- Inner sheath** : PVC / as per Customer Specification.
- Armouring** : Strip, Wire, G.I. and Aluminium
- Outer sheath** : PVC ST-2 / HFFR EBXL / as per Customer Specification

Technical Data :

- Operating Temperature** : -150C to 1250C
- Short Circuit Temperature** : 250°C
- Bending radius (min)** : 12 x Cable Dia
- Rated Voltage** : 1.1 KV
- Test Voltage** : 3.0 kV for 5 mins.
- Specification** : IS:7098 Part-I : 1988



Advantages of e-Beam Cross-Linked Over Conventional System

S. NO	Parameters	e-Beam Cross Linking	Coventional XLPE
1	Cross-Linking Bond	C - C	C – S x -C or C – O x -C
2	Operating Temperature	Up to 125°C	Up to 90°C
3	Life of Cable	40 Years (Min.)	10 Years (Min.)
4	Variation in Mechanical Parameters at Ageing at 135°C / 7 Days.	-5%	-25%
5	Effect on High Overload Current	Not Burned	Burned
6	Impurity in Compound	No Colour Pigment	Impurity adding by colour pigment
7	Cold Bend Test	- 40°C	- 15°C
8	Blooming Effects	No Effect.	Chances to bloom to Outer Layer Lead to surface deterioration.
9	Polymer Degradation during cross-linking	No	Yes
		As eB Cross Linking occurs at room temperature	As cross-linking occurs at higher temperature (90°C)
10	Oxidative degradation	No	Yes




Features : eB⁺ Power Cables

- e-Beam Cross-Linked "Power Cables" .
- Offers 30% higher current carrying overload conditions)
- Rated Temperature : 125°C
- Minimize current leakages with high insulation resistance
- Resistant to corona effect
- Low direct electric losses
- High insulation resistance at elevated temperature,
- prevents fires caused due to overloads.
- Life Span 40+ years

Our Product Range



Building Wire



Flexi-Tuf Submersible Cable



HT/LT Cables



Solar Solutions



HTLS Conductor



Data Center Cables



Railway Cables



Fan




MVCC & Accessories



Light Duty Cables



Switchgears



Switches

Our Presence



25 States & UTs
850+ Employees
20+ Years of Operation



Registered Office :

V-MARC INDIA LIMITED

Plot No.3 & 4, 18 & 20A, Sector-IIDC, SIDCUL, Haridwar, Uttarakhand - 249403